

## KATADYN GROUP

# CAPE HORN EXTREME 330R COMPACT WATERMAKER

#### PRODUCT SPECIFICATIONS

330 gal (1249 l) Production / Day Production / Hour 15 gal (56 l)

Power Requirement

12 V DC 19A | 24 V DC 10A 16 Watts/1 gal | 4.2 Watts/1 liter

88 lbs (40 kg) Weight

Pre Filters 2.5" x 10" pleated polyester 5 micron

Controls Analog controls

Dedicated thruhull, dry and well ventilated area not to exceed 110°F/37°C Installation Requirements

Membranes (2) 20" x 2.5" High rejection spiral wound

polyamide

Pump and Motor Shurflo diaphragm pump

Salt Rejection 99.2%

Max 110°F/37°C Min 36°F/2°C Temperature Range

33.000 PPM feed water at 77°F/25°C **Baseline Conditions** 

pH Range 3-11 (typical seawater pH is 8)

Chlorine Tolerance O PPM

Warranty Spectra standard warranty

108 lbs (49 kg) Shipping Weight 36" x 25" x 21" Shipping Dimensions

91 cm x 63 cm x 53 cm





#### **FACTS**

The Cape Horn Extreme continues to be the choice for serious offshore racing campaigns like the Volvo Ocean Race and Clipper Challenge round-the-world yachts. The Cape Horn Extreme is reliable and durable, with its diaphragm feed pumps in parallel, it can be run on a single pump for high efficiency or two pumps for high output. The system uses rugged mechanical controls and gauges and is perfect for the handson racer or cruiser.

#### **FEATURES**

- Redundant dual feed pumps for maximum reliability
- Simple analog control panel
- Compact modular design
- Spectra's unique Clark Pump for efficiency and reliability
- High and low speed operation for customizable power management and output volume
- Low power consumption—can be run on batteries, solar, or wind power
- Commercial grade diaphragm pumps with run dry protection
- System includes installation kit, handheld water quality tester, and product sample valve
- Z±ION Compatible



# CAPE HORN EXTREME 330R COMPACT WATERMAKER



Feed Pump Module Depth 4.5" / 11.4 cm



**Remote Manual Control Panel** Depth 0.6" / 1.5 cm




**Remote Monitoring Panel** Depth 1.6" / 4.1 cm



Secondary Feed Pump Module Depth 6" / 5.2 cm

14.5" 37 cm

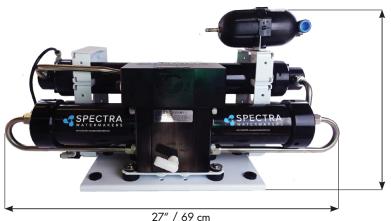

High Pressure Clark Pump and Membrane Depth 12" / 30.5 cm

### **OPTIONAL COMPONENTS**



**Z±ION System Protection, Manual** Z±ION-MAN

Katadyn reserves the right to modify products

### Katadyn Desalination LLC.

Spectra Watermakers 2220 S McDowell Blvd Ext Petaluma, CA 94954

TEL: 1-415-526-2780 FAX: 1-415-526-2787 E-MAIL: sales@spectrawatermakers.com

www.spectrawatermakers.com