

## CAPE HORN EXTREME 330 WATERMAKER

### PRODUCT SPECIFICATIONS

Production / Day	330 gal (1249 l)
Production / Hour	15 gal (56 l)
Power Requirement	12 V DC 19A   24 V DC 10A 16 Watts/1 gal   4.2 Watts/1 liter
Weight	85 lbs (38.5 kg)
Pre Filters	2.5" x 10" pleated polyester 5 micron
Controls	Analog controls
Installation Requirements	Dedicated thruhull, dry and well ventilated area not to exceed 110°F/37°C
Membranes	40" x 2.5" High rejection spiral wound polyamide
Pump and Motor	Shurflo diaphragm pump
Salt Rejection	99.2%
Temperature Range	Max 110°F/37°C Min 36°F/2°C
Baseline Conditions	33,000 PPM feed water at 77°F/25°C
pH Range	3-11 (typical seawater pH is 8)
Chlorine Tolerance	0 PPM
Warranty	Spectra standard warranty
Shipping Weight	105 lbs (47.6 kg)
Shipping Dimensions	47" x 23" x 18" 120 cm x 59 cm x 46 cm




### FACTS

The Cape Horn Extreme continues to be the choice for serious offshore racing campaigns like the Volvo Ocean Race and Clipper Challenge round-the-world yachts. The Cape Horn Extreme is reliable and durable, with its diaphragm feed pumps in parallel, it can be run on a single pump for high efficiency or two pumps for high output. The system uses rugged mechanical controls and gauges and is perfect for the hands-on racer or cruiser.


### FEATURES

- Redundant dual feed pumps for maximum reliability
- Simple analog control panel
- Compact modular design
- Spectra's unique Clark Pump ensures efficiency and reliability
- High and low speed operation for customizable power management and output volume
- Low power consumption—can be run on batteries, solar, or wind power
- Whisper quiet
- Commercial grade diaphragm pumps with run dry protection
- System includes installation kit, handheld water quality tester, and product sample valve
- Z±ION Compatible

## CAPE HORN EXTREME 330 WATERMAKER

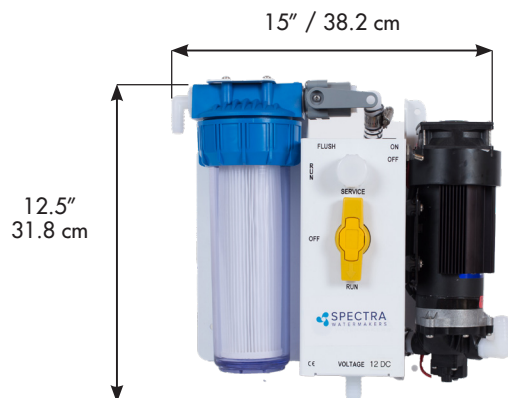

**Feed Pump Module**  
 Depth 4.5" / 11.4 cm



**Remote Monitoring Panel**  
 Depth 1.6" / 4.1 cm



**Secondary Feed Pump Module**  
 Depth 6" / 5.2 cm



**High Pressure Clark Pump and Membrane**  
 Depth 12" / 30.5 cm

### OPTIONAL COMPONENTS



**Z±ION System Protection, Manual**  
 Z±ION-MAN

Spectra Watermakers reserves the right to modify products

### Katadyn Desalination

Spectra Watermakers

2220 S McDowell Blvd Ext

Petaluma, CA 94954

TEL: 1-415-526-2780 FAX: 1-415-526-2787

E-MAIL: [sales@spectrawatermakers.com](mailto:sales@spectrawatermakers.com)

[www.spectrawatermakers.com](http://www.spectrawatermakers.com)