
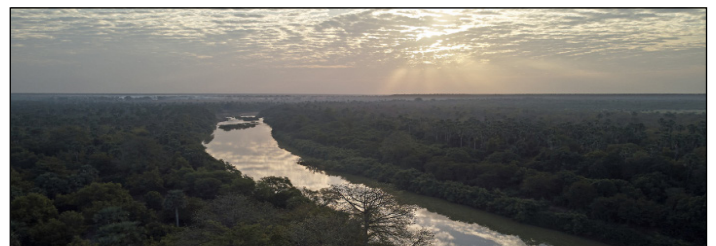


LB-14000 F - LARGE SCALE BRACKISH WATER SOLUTION

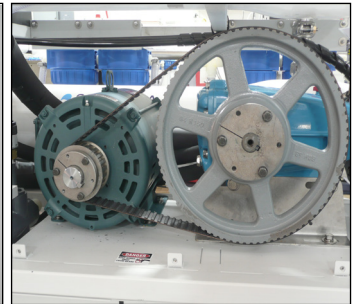


PRODUCT SPECS

Production per Day	14,000 gal (53 m ³)
Production per Hour	583 gal (2207 l)
Salt Rejection	99.5%
Recovery Rate	Up to above 55%
Technology	High energy-efficient Reverse-Osmosis (RO)
Feed Water Source	Brackish (Up to 25,000 PPM)
Feed Flow Rate	Feed Flow is 75 lpm (20gpm) at 2 bar (30 psi). Note that the feed pressure needs to be adjustable to optimize pump performance for the pre-filtration system utilized.
Boost Pump	Not Included, See page 3
Voltage Options	208-240 V AC, single or three phase
Power	<3.6 kW**
Watt per Liter	<1.8 kWh**
Water Temperature Limits	Max 110°F (43°C) Min 36°F (2°C)
Sound Pressure Level	79 dB at 1 meter
Weight	1675 lbs (760 kg)
Frame Dimensions	70" x 34.5" x 42" 178 cm x 88 cm x 107 cm

FEATURES

- Optimized for use with Brackish water (Total Dissolved Solids under 24,000 PPM)
- Spectra Connect Controller for automated operation and LAN enabled remote monitoring and control
- Extremely energy efficient, requiring less than 3.6 kW to purify seawater
- Soft-start speed control, no start-up spike
- Rugged, powder coated 304 stainless steel frame
- Fixed freshwater recovery ratio for easy operation, optimized for long RO membrane life
- Perfectly pairs with wind or solar power due to high energy efficiency
- Significantly quieter than conventional RO watermakers
- Patented energy recovery design and automated controls eliminate the need for constant monitoring by an operator.
- Membranes are protected from overpressure and scaling by design and can last 8-10 years or more with proper maintenance

LB-14000 F - LARGE SCALE BRACKISH WATER SOLUTION

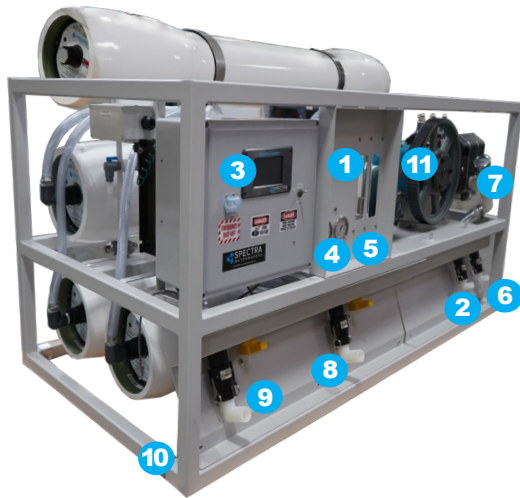

1	Product Quality + Feed Flow Gauges
2	Product Water Out
3	Spectra Connect Control Panel
4	Boost Pressure Gauge
5	Membrane Pressure Gauge
6	Service Port
7	Brine Pressure Gauge
8	Brine Port
9	Water Inlet
10	Rugged 304 Stainless Steel Frame
11	5HP 220 V Motor

12	Pearson Pump Energy Recovery Device
13	8" x 40" Membranes
14	VFD Speed Control



SYSTEM SHIPPING LIST

System
LB-14,000 in Powder Coated Stainless Steel Frame
Components Built into Frame Assembly
Pearson Pump Energy Recovery System
4 1000psi composite high pressure vessels w/ Filmtec 8"x 40" seawater RO membranes
5HP Motor, 220 V AC single phase
Spectra Connect Control System
Powder Coated 304 Stainless Steel frame
Installation Kit
Service Hoses and Filter Wrench
User Manual

LB-14000 F - LARGE SCALE BRACKISH WATER SOLUTION

SPARE PARTS AND CONSUMABLES

Article Number	Product
FT-FTC-5BB20	5 micron 4 x 20" cartridge filter
FT-FTC-10BBCALCITE	10" Big Blue Calcite filter - For optional remineralization of drinking water
KIT-SP20-55R2K5	2,500 hr SPP20-55 Pearson Pump rebuild kit
KIT-SP20-55R10K	10,000 hr SPP20-35 Pearson Pump rebuild kit
PP-20-BD-BT540H	SPP20 540H150 drive belt
KIT-CHEM-SC2	Spectra alkaline membrane cleaner
KIT-CHEM-SC3	Spectra acid cleaner
KIT-CHEM-SC1	Spectra membrane preservative

OPTIONAL COMPONENTS

Article Number	Product	Description
KIT-LB-BP-20SC	Shallow Well Jet Boost Pump Kit	Includes 3-Phase 220 V, 50GPM Boost Pump & VFD Motor Speed Controller.
KIT-MD-AG16X65	Automated 16" x 65" Multi-Media Tank Kit	Media filter is configured for seawater and optimized for easy backflushing. Specify voltage requirement at time of order. Media not included.
KIT-FLT-CALCTBB	Remineralizer and PH-correction Calcite Filter Kit 4" x 10"	A calcite cartridge is used to balance the PH and remineralize the product water in brackish water systems (not needed with seawater feed).
KIT-PMP-6GPDINJ	Chlorine or Chemical Injection System	This unit precisely meters concentrate into the feed or product water depending on desired application. Chlorine on product side is most common application.
KIT-FLT-LB20CCBB	Carbon Filter Kit 20"	For removing chlorine from freshwater flush feed or used on the product water side to improve taste.
EL-SWT-SMLV	Tank Level Switch	Allows the Spectra Connect control to respond automatically to changes in storage tank levels.
PL-PRG-3/4FPVC	Pressure Regulator Kit	3/4" Pressure Regulator 5-125 PSI 35GPM. Used to regulate feed pressure on systems using an aftermarket boost pump without precise controls.

ALL PORTABLE & STATIONARY LANDBASED SYSTEMS

AQUIFER SERIES

Article Number	Product	Product Information	Output
AF-200-DC-12 AF-200-DC-24	Aquifer 200	Highly portable water purification/desalination system. In-case suction pump, external power required.	30 l/h, 8 gal/h
AF-360-DC-12 AF-360-DC-24	Aquifer 360	Highly portable water purification/desalination system with dual in-case suction pumps for higher output, external power required.	55 l/h, 15 gal/h
AF-200-EX-FL	Aquifer 200 EXP Flight Ready	Flight ready and enhanced priming capability using submersible pumps. External power required, compatible with optional Solar Power Pack (KIT-AF-FLRPS3P24).	30 l/h, 8 gal/h
AF-200-PPS	Aquifer 200 Power Pack Solar	Included Solar Panel, a self-sufficient offgrid water purification/desalination solution that fits in a single case.	30 l/h, 8 gal/h
AF-360-EX-FL	Aquifer 360 EXP Flight Ready	Flight ready and enhanced priming capability using submersible pumps, with higher output. External power required, compatible with optional Solar Power Pack (KIT-AF-FLRPS3P24).	55 l/h, 15 gal/h
AF-4000	Aquifer 4000	Revolutionary ultra-high output portable system, 3.5kW generator or external power required.	628 l/h, 166 gal/h
KIT-AF-FLRPS3P24	3 Panel Power Supply Case	Power supply case with options for 12/24 V DC, 100-240 V AC 50/60 Hz as well as included Solar Panels. Compatible with AF-200-EX-FL and AF-360-EX-FL.	n/a

LANDBASED SERIES

Article Number	Product Information	Watts Used*	Output
LB-400	Compact, modular purification/desalination	300	64 l/h, 17 gal/h
LB-1800M-220	Framed watermaker with manual controls	800	285 l/h, 75 gal/h
LB-1800C-220	Framed watermaker with automated Spectra Connect controller	800	285 l/h, 75 gal/h
LB-2800F-220M	Framed watermaker with manual controls	1200	435 l/h, 115 gal/h
LB-2800C-220	Framed watermaker with automated Spectra Connect controller	1200	435 l/h, 115 gal/h
LB-4000-220	Brackish water system, framed with manual controls	1200**	680 l/h, 180 gal/h
LB-4000C-220	Brackish water system, framed with automated Spectra Connect controller	1200**	680 l/h, 180 gal/h
LB-10000F-230S	Framed watermaker with automated Spectra Connect controller	3800	1,575 l/h, 420 gal/h
LB14000F-230	Brackish water system, framed with automated Spectra Connect controller	5300**	2,208 l/h, 583 gal/h

*Using Seawater feed at 32,000 ppm and 25°C (77°F).

**25,000 ppm maximum salinity for these brackish water systems

Katadyn Desalination, LLC.

Spectra Watermakers
2220 S. McDowell Blvd Ext
Petaluma, CA 94954 U.S.A.

Tel: +1 415 526 2780 | Fax: +1 415 526 2787

sales@spectrawatermakers.com | www.spectrawatermakers.com

Spectra Watermakers reserves the right to make changes to this fact sheet.