

LB-2800 C - ENERGY-EFFICIENT WATER PRODUCTION



PRODUCT SPECS

Production per Day	2800 gal (10,600 l)
Production per Hour	115 gal (435 l)
Salt Rejection	99.5%
Recovery Rate	30%
Technology	High energy-efficient Reverse-Osmosis (RO)
Feed Water Source	Fresh, brackish, seawater
Feed Flow Rate	Recommended Feed Flow rate is 24 lpm (6.5gpm) at 2 bar (30 psi). Note that the feed pressure needs to be adjustable to optimize pump performance for the pre-filtration system utilized.
Boost Pump	Not Included, See page 3
Power Requirement	208-240 V AC, single or three phase
Power	1200W
Watt per Liter	<2.5
Water Temperature Limits	Max 110°F (43°C) Min 36°F (2°C)
Sound Pressure Level	79 dB at 1 meter
Weight	475 lbs (216 kg)
Frame Dimensions	53" x 40" x 28" 135 cm x 102 cm x 71 cm


FEATURES

- Spectra Connect Controller for automated operation and LAN enabled remote monitoring and control
- Extremely energy efficient, requiring typically less than 1200 watts to purify seawater
- Soft-start speed control, no start-up spike
- Rugged, powder coated 304 stainless steel frame
- Fixed freshwater recovery ratio for easy operation, optimized for long RO membrane life
- Perfectly pairs with wind or solar power due to high energy efficiency
- Significantly quieter than conventional RO watermakers
- Patented energy recovery design and automated controls eliminate the need for constant monitoring by an operator.
- Membranes are protected from overpressure and scaling by design and can last 8-10 years or more with proper maintenance
- Spectra Watermakers' renowned customer service and support with technicians available by phone, e-mail, and WhatsApp in North America

LB-2800 C - ENERGY-EFFICIENT WATER PRODUCTION



1	Product Quality + Feed Flow Gauges
2	Product Water Out
3	Spectra Connect Control Panel
4	Boost Pressure Gauge
5	Membrane Pressure Gauge
6	Brine Pressure Gauge
7	Service Port
8	Brine Port
9	Service Valve
10	4" x 40" Membranes

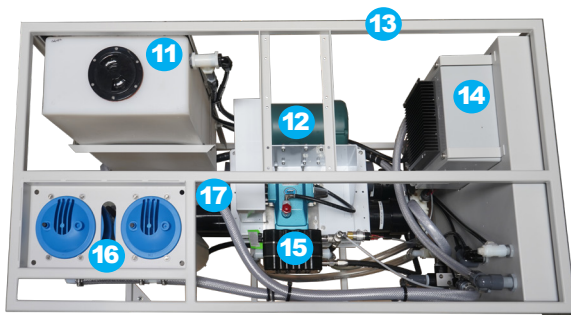

11	Flush/Service Module
12	2HP 220 V Motor
13	Rugged 304 Stainless Steel Frame
14	Spectra Connect Control System
15	Pearson Pump Energy Recovery Device
16	Prefilter Assembly
17	4" x 40" Membranes

SYSTEM SHIPPING LIST

System
LB-2800 in Powder Coated Stainless Steel Frame
Components Built into Frame Assembly
Pre-Filtration Assembly - Two 4 x 20" Filters
Fresh Water Flush Tank
Inlet and Brine Discharge Service Connections
Spectra Connect Control Box with Main Circuit Breaker
Feed Valve - Automatic On/Off
24 V DC Power Supply (for controls)
Installation Kit
Service Hoses and Filter Wrench
User Manual

LB-2800 C - ENERGY-EFFICIENT WATER PRODUCTION

SPARE PARTS AND CONSUMABLES

Article Number	Product
FT-FTC-5BB20	5 micron 4 x 20" cartridge filter
FT-FTC-10BBCALCITE	10" Big Blue Calcite filter - For optional remineralization of drinking water
KIT-SP5C-30R2K5	2,500 hr SPP5-30 Pearson Pump rebuild kit
KIT-SP5C-30R10K	10,000 hr SPP5-30 Pearson Pump rebuild kit
PP5-BD-BLT300H	Drive belt
KIT-CHEM-SC2	Spectra alkaline membrane cleaner
KIT-CHEM-SC3	Spectra acid cleaner
KIT-CHEM-SC1	Spectra membrane preservative

OPTIONAL COMPONENTS

Article Number	Product	Description
KIT-LB-BP-SP5AC	Shallow Well Jet Boost Pump Kit	Includes 3-Phase 220 V, 7-12GPM Boost Pump & VFD Motor Speed Controller
KIT-MD-AG14X65	Automated 14" x 65" Multi-Media Tank Kit	Media filter is configured for seawater and optimized for easy backflushing. Specify voltage requirement at time of order. Media not included.
KIT-FLT-CALCTBB	Remineralizer and PH-correction Calcite Filter Kit 4" x 10"	A calcite cartridge is used to balance the PH and remineralize the product water in brackish water systems (not needed with seawater feed).
KIT-PMP-3GPDINJ	Chlorine or Chemical Injection System	This unit precisely meters concentrate into the feed or product water depending on desired application. Chlorine on product side is most common application.
KIT-FLT-LB20CCBB	Carbon Filter Kit 20"	Generally used on the product water side to improve taste.
EL-SWT-SMLV	Tank Level Switch	Allows the Spectra Connect control to respond automatically to changes in storage tank levels.
PL-PRG-3/4FPVC	Pressure Regulator Kit	3/4" Pressure Regulator 5-125 PSI 35GPM. Used to regulate feed pressure on systems using an aftermarket boost pump without precise controls.

ALL PORTABLE & STATIONARY LANDBASED SYSTEMS

AQUIFER SERIES

Article Number	Product	Product Information	Output
AF-200-DC-12 AF-200-DC-24	Aquifer 200	Highly portable water purification/desalination system. In-case suction pump, external power required.	30 l/h, 8 gal/h
AF-360-DC-12 AF-360-DC-24	Aquifer 360	Highly portable water purification/desalination system with dual in-case suction pumps for higher output, external power required.	55 l/h, 15 gal/h
AF-200-EX-FL	Aquifer 200 EXP Flight Ready	Flight ready and enhanced priming capability using submersible pumps. External power required, compatible with optional Solar Power Pack (KIT-AF-FLRPS3P24).	30 l/h, 8 gal/h
AF-200-PPS	Aquifer 200 Power Pack Solar	Included Solar Panel, a self-sufficient offgrid water purification/desalination solution that fits in a single case.	30 l/h, 8 gal/h
AF-360-EX-FL	Aquifer 360 EXP Flight Ready	Flight ready and enhanced priming capability using submersible pumps, with higher output. External power required, compatible with optional Solar Power Pack (KIT-AF-FLRPS3P24).	55 l/h, 15 gal/h
AF-4000	Aquifer 4000	Revolutionary ultra-high output portable system, 3.5kW generator or external power required.	628 l/h, 166 gal/h
KIT-AF-FLRPS3P24	3 Panel Power Supply Case	Power supply case with options for 12/24 V DC, 100-240 V AC 50/60 Hz as well as included Solar Panels. Compatible with AF-200-EX-FL and AF-360-EX-FL.	n/a

LANDBASED SERIES

Article Number	Product Information	Watts Used*	Output
LB-400	Compact, modular purification/desalination	300	64 l/h, 17 gal/h
LB-1800M-220	Framed watermaker with manual controls	800	285 l/h, 75 gal/h
LB-1800C-220	Framed watermaker with automated Spectra Connect controller	800	285 l/h, 75 gal/h
LB-2800F-220M	Framed watermaker with manual controls	1200	435 l/h, 115 gal/h
LB-2800C-220	Framed watermaker with automated Spectra Connect controller	1200	435 l/h, 115 gal/h
LB-4000-220	Brackish water system, framed with manual controls	1200**	680 l/h, 180 gal/h
LB-4000C-220	Brackish water system, framed with automated Spectra Connect controller	1200**	680 l/h, 180 gal/h
LB-10000F-230S	Framed watermaker with automated Spectra Connect controller	3800	1,575 l/h, 420 gal/h
LB14000F-230	Brackish water system, framed with automated Spectra Connect controller	5300**	2,208 l/h, 583 gal/h

*Using Seawater feed at 32,000 ppm and 25°C (77°F).

**25,000 ppm maximum salinity for these brackish water systems

Katadyn Desalination, LLC.

Spectra Watermakers
 2220 S. McDowell Blvd Ext
 Petaluma, CA 94954 U.S.A.

Tel: +1 415 526 2780 | Fax: +1 415 526 2787

sales@spectrawatermakers.com | www.spectrawatermakers.com

Spectra Watermakers reserves the right to make changes to this fact sheet.