

VENTURA 200T WATERMAKER

PRODUCT SPECIFICATIONS

Production / Day	200 gal (757 l)
Production / Hour	8.3 gal (31 l)
Power Requirement	12 V DC 10A 24 V DC 5A 14.5 Watts/1 gal 4 Watts/1 liter
Weight	60 lbs (27.7 kg)
Pre Filter	2.5" x 10" pleated polyester 5 micron
Controls	Analog controls
Installation Requirements	Dedicated thruhull, dry and well ventilated area not to exceed 110°F/37°C
Membranes	20" x 2.5" High rejection spiral wound polyamide
Pump and Motor	Shurflo diaphragm pump
Salt Rejection	99.2%
Temperature Range	Max 110°F/37°C Min 36°F/2°C
Baseline Conditions	33,000 PPM feed water at 77°F/25°C
pH Range	3-11 (typical seawater pH is 8)
Chlorine Tolerance	0 PPM
Warranty	Spectra standard warranty
Shipping Weight	80 lbs (36 kg)
Shipping Dimensions	36" x 25" x 21" 91 cm x 63 cm x 53 cm






FACTS

The Ventura 200T is the same size and configuration as the Ventura 150, but uses a higher displacement Clark Pump to produce more water. This allows it to operate in warm waters above 50°F (10°C), delivering over 8 gallons (31 liters) per hour. With its modular design, it's an ideal system for installation in tight spaces whether you're cruising, fishing, or racing. Simple analog controls and gauges display the feed water pressure and the product flow meter. A hand-held salinity monitor and a three-way valve for product water testing are included.

FEATURES

- Simple analog control panel
- Compact modular design
- Spectra's unique Clark Pump ensures efficiency and reliability
- Low power consumption—can be run on batteries, solar, or wind power
- Whisper quiet
- Commercial grade diaphragm pumps with run dry protection
- System includes installation kit, handheld water quality tester, and product sample valve
- Z±ION Compatible

VENTURA 200T WATERMAKER

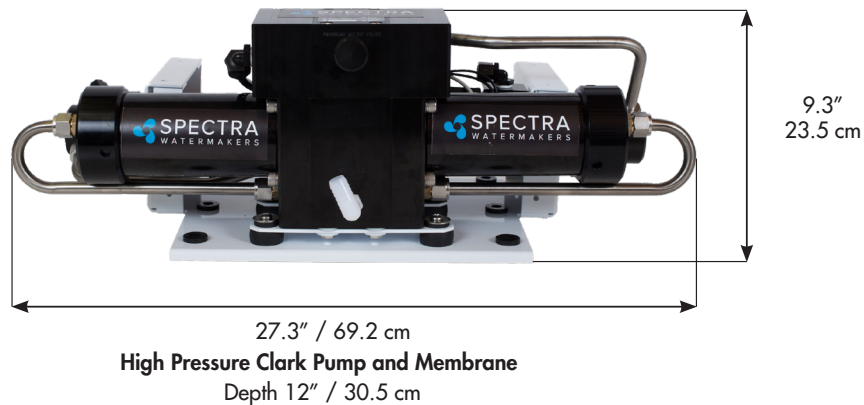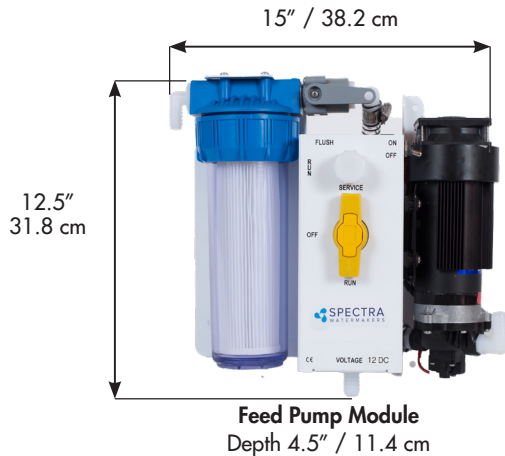

OPTIONAL COMPONENTS



Z±ION System Protection, Manual
Z±ION-MAN

Katadyn reserves the right to modify products

Katadyn Desalination LLC.

Spectra Watermakers

2220 S McDowell Blvd Ext

Petaluma, CA 94954

TEL: 1-415-526-2780 FAX: 1-415-526-2787

E-MAIL: sales@spectrawatermakers.com

www.spectrawatermakers.com